


SPINTSO REFEREE WATCH2 S MANUAL



(Article number SPT130)

SET /LIGHT (A key)

MODE (B key)

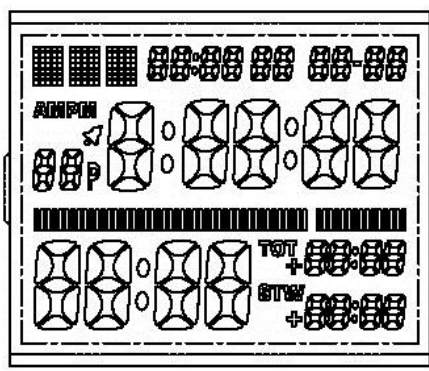


(D key) UP/START

(C key) DOWN/RESET


A . Features

- Display hour, minute, second, year, month, date, week
- Auto Calendar: 2000 ~ 2099 year
- 12/24 hour format
- World time: 24 time zones, 50 cities time.
- Referee mode
- Alarm
- EL backlight
- Key tone (B sound once push the button)

B . Operational Manual

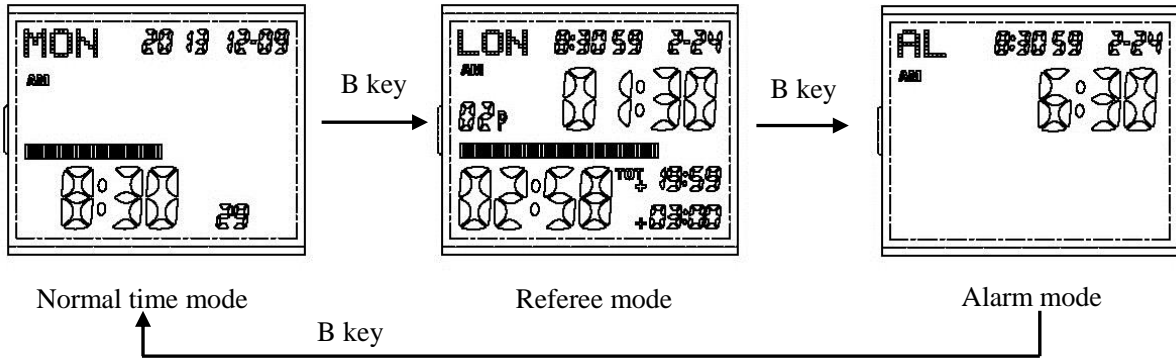

- Anytime, press A key EL Backlight for 3 seconds
- Normal time mode, press B key to choose operation mode

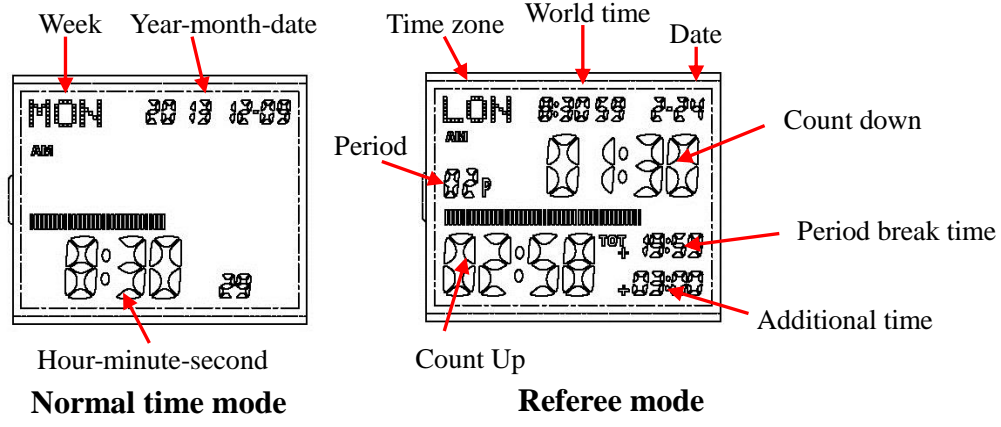


1. Time and date setting

- When in normal time mode, press A key 3 seconds to enter setting, press B key will flash as below sequence:

SPINTSO REFEREE WATCH2 S MANUAL

(Article number SPT130)

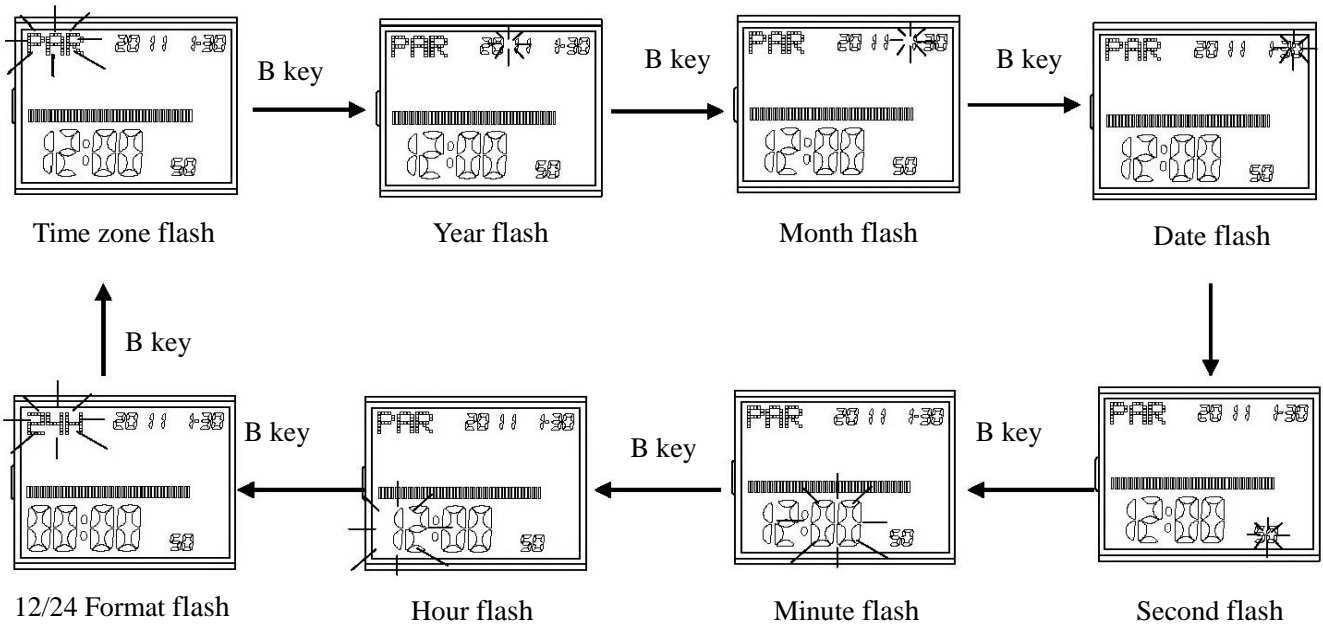

- Press D to adjust up the time zone or increase the values, keep press D key to soon adjust up time zone or fast increase the values
- Press C to adjust down the time zone or decrease the values, keep press C key to soon adjust down time zone or fast decrease the values.
- When adjust the second, press D or C to clear seconds to 00
- It will return to interval training mode automatically after 1 minute if there's no key pressed


2. Referee mode

Timing range

- The display range of countdown is: 01~99 minutes.
- The display range of count up is: 01~ 99 minutes 59 seconds
- The display range of period break time is: 01~ 99 minutes
- The display range of additional time is: 99 minutes 59 second.
- The watch will automatically stop after counting down of final period is finished, keep press C key for 3 seconds to clear the game data, but the original setting will not be cleared.

Referee countdown setting:

- When in referee mode, press A key 3 seconds to enter setting, press B key will flash as below sequence

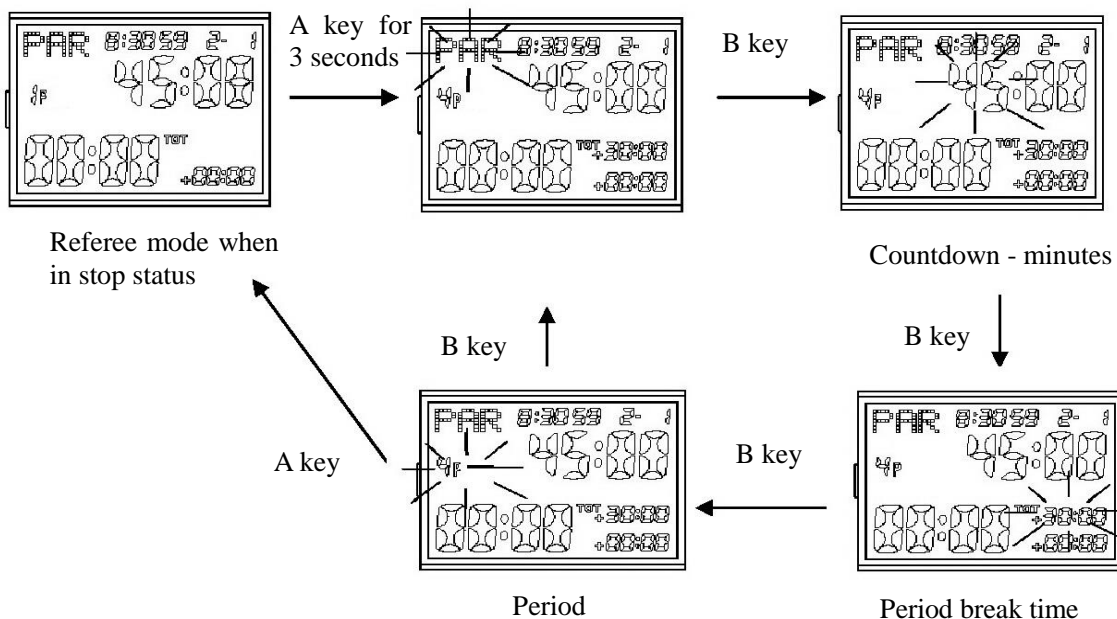

SPINTSO REFEREE WATCH2 S MANUAL


(Article number SPT130)

- Press D to adjust the time zone or increase the values, keep press D key to soon adjust up time zone or fast increase the values
- Press C to adjust down the time zone or decrease the values, keep press C key to soon adjust down time zone or fast decrease the values.
- Press A key to confirm and exit the setting, return to referee mode
- When changed the time zone City, the time and date will change automatically to match
- It will return to referee mode automatically after 1 minute if there's no key pressed

The count up continue run.

The referee mode operate

- When in normal time mode, press B key to enter the referee mode
- Press D key to start countdown, meanwhile count up will automatically start
- Press D key to stop countdown when it's running, the additional time will automatically start counting
- Press D key to stop additional time and resume the countdown counting
- When countdown reached to 00 then automatic the period break time starts counting down to 00. The count up continue counting until you press D key to start next period.
- Press D key to start the next period no matter period break time count to 00 or not, see below image:

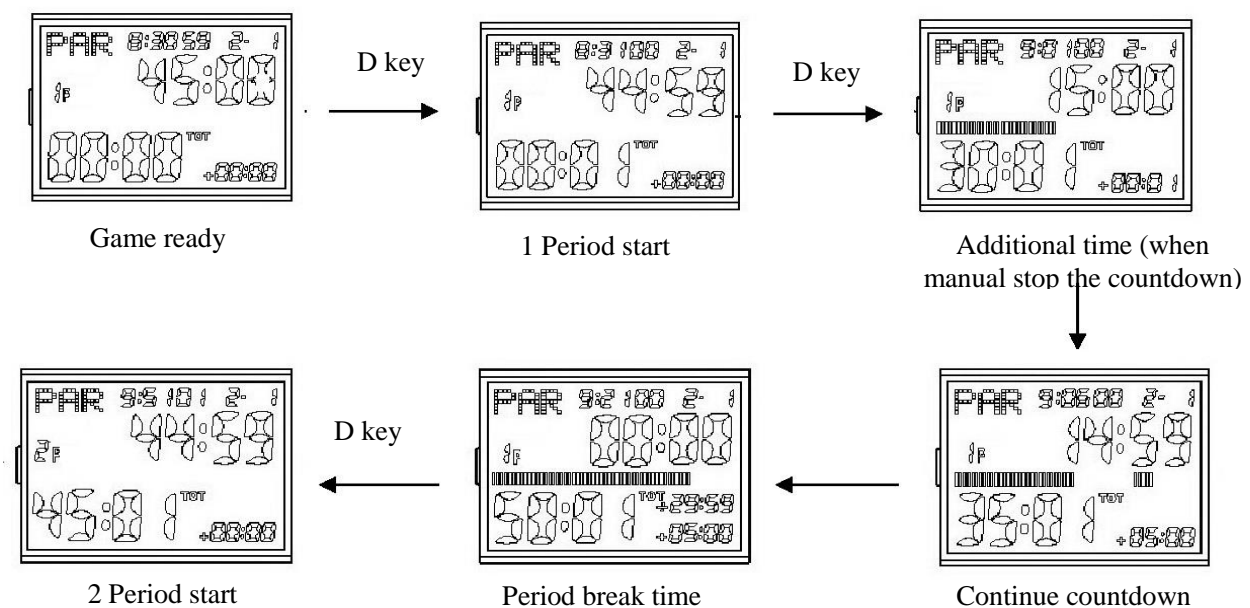

- When the watch is stopped during the game, the BB BB BB BB BB alarm will alert every 10 seconds, every time last 5 seconds (Only alert for the first 10 minutes)
- The indicator bar will running according to the every period of countdown and indicate the time of game. When the green and blue bar is completely filled the time of the game is finish.
- When countdown to 00, B.B.B.B...will alert every 0.5 second and will last about 10 seconds
- When period break time count to 00, BB..BB...will alert for about 10 seconds
- When game running, press B key to switch to other mode. The referee mode will be running in the background
- When countdown in running or stopped , press D key for 5 seconds will delete the last period data and return to last period settings.
- When countdown in running or stopped, press C key to check the settings data, if press the C key more than 3 seconds will delete the current game time and return to the last settings.

Keytone:

- Eevery time you press D key to start, will alert B alarm, press D key to stop will alert BB alarm


3. Alarm mode


- In alarm mode, press D key to ON/OFF the alarm, press A key for 3 seconds the HOUR will flash, press B key to select MINUTE or HOUR, it will flash as below:

SPINTSO REFEREE WATCH2 S MANUAL



(Article number SPT130)

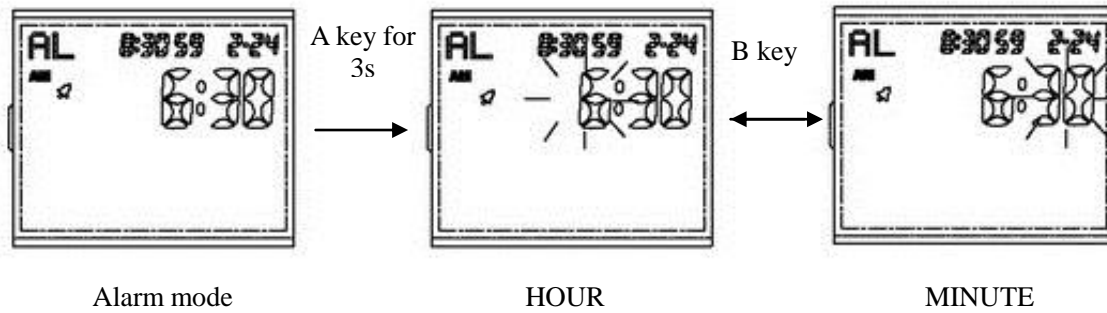

- Press D key to adjust increase, press C key will adjust decrease, keep pressing will adjust quickly
- Press A key to confirm and return to Alarm mode
- It will return to alarm mode automatically after 1 minute if there's no key pressed
- If alarm ON, and time reach the time setting, BB..BB.. alarm will alert 20 seconds, the icon “” will flash, press any key to stop alarm.

C. Standard

- Case dimension : 42x35x15 mm
- Weight : 58g
- Work temperature : -10°C~60°C
- Work voltage : 3V
- Time Veracity : ±30 seconds/month
- Battery type : CR2032
- Static average drive current : ≤8.54 u A
- Alarm ring current : ≤12 m A
- Lighting current average : ≤7.36 m A
- Battery life term approx. : ≥1 year
- 10ATM
- Sound 75db

The battery life: Since the battery in your watch is battery monitor inserted at the factory to check the function and performance of the watch, it may run down in less than the specified period after that date of purchase

10 ATM: never operate the button in water, otherwise water may gate inside the watch and damage it

SPINTSO REFEREE WATCH2 S MANUAL



(Article number SPT130)

GMT Differential/City Code List

City Code	City	GMT Differential	Other major cities in same time zone
PPG	Pago Pago	-11.0	
HNL	Honolulu	-10.0	Papeete
ANC	Anchorage	-09.0	Nome
YVR	Vancouver	-08.0	Las Vegas, Seattle/Tacoma, Dawson City
SFO	San Francisco		
LAX	Los Angeles		
DEN	Denver	-07.0	Edmonton, EI Paso
MEX	Mexico City	-06.0	Houston, Dallas/Fort Worth, New Orleans, Winnipeg
CHI	Chicago		
MLA	Miami	-05.0	Montreal, Detroit, Boston, Panama City, Havana, Lima, Bogota
NYC	New York		
CCS	Caracas	-04.0	La Paz, Santiago, Port Of Spain
YYT	St Johns	-03.5	
RIO	Rio De Janeiro	-03.0	Sao Paulo, Buenos Aires, Brasilia, Montevideo
RAI	Praia	-01.0	
LIS	Lisbon	+00.0	Dublin, Casablanca, Dakar, Abidjan
LON	London		
BCN	Barcelona	+01.0	Amsterdam, Algiers, Hamburg, Frankfurt, Vienna, Madrid, Stockholm
PAR	Paris		
MIL	Milan		
ROM	Rome		
BER	Berlin		
ATH	Athens	+02.0	Helsinki, Beirut, Damascus, Cape Town
JNB	Johannesburg		
IST	Istanbul		
CAI	Cairo		
JRS	Jerusalem		
MOW	Moscow	+03.0	Kuwait, Riyadh, Aden, Addis Ababa, Nairobi
JED	Jeddah		
THR	Tehran	+03.5	Shiraz
DXB	Dubai	+04.0	Abu Dhabi, Muscat
KBL	Kabul	+04.5	
KHI	Karachi	+05.0	
MLE	Male		
DEL	Delhi	+05.5	Mumbai, Kolkata
DAC	Dhaka	+06.0	Colombo
RGN	Yangon	+06.5	
BKK	Bangkok	+07.0	Phnom Penh, Hanoi, Vientiane
JKT	Jakarta		
SIN	Singapore	+08.0	Kuala Lumpur, Taipei, Manila, Perth, Ulaanbaatar
HKG	Hong Kong		
BJS	Beijing		
SEL	Seoul	+09.0	Pyongyang
TYO	Tokyo		
ADL	Adelaide	+09.5	Darwin
GUM	Guam	+10.0	Melbourne, Rabaul
SYD	Sydney		
NOU	Noumea	+11.0	Port Vila
WLG	Wellington	+12.0	Christchurch, Nadi, Nauru Island
TBU	Nukualofa	+13.0	